

# FIRE ISOLATOR

## Datasheet FireBlanket FI-BLULTRA0806

### Product description

The T-ISS FireBlanket Ultra can be used for normal, combustion-engined and EV car fires. It can be deployed in parking garages, parking lots, shopping malls, onboard ferries, etc. The blanket can be used for all car sizes from a small city car up to large SUV models.

Due to depriving the oxygen inlet, the car fire will be isolated. The fire will not spread and will avoid collateral damage, also the smoke spread will stop and gives fire crews easier access to the vehicle.

The FireBlanket is reusable up to 30 times and can be cleaned. It can stand peak temperatures of 1700 °C, and has a continuous working temperature of 1200 °C. The FireBlanket Ultra FI-BLULTRA0806 is easy to deploy.

### Pictures




### Dimensions & Specifications

Art. No:	FI-BLULTRA0806
Size:	FireBlanket ≈ 800 x 600 cm *
Weight:	38 kg
Material :	Ultra high Silica grade, silicone coating
Temperature:	+ 1700 °C tested
Tests:	ASTMD6413, ISO 13501-1

Item	Specification
Weave	8HS Stain
Thickness (mm)	0.65±0.07
Width (mm)	1000±14
Length (m)	50±0.5
Weight (g/m <sup>2</sup> )	600±20
Tensile Strength	Wrap (N/25x100mm)
	Weft (N/25x100mm)
Coating	Black Silicone on both sides
Silicone weight (g/ m <sup>2</sup> )	230±30
Total weight (g/ m <sup>2</sup> )	830 (-10/ +30)

### Pictures

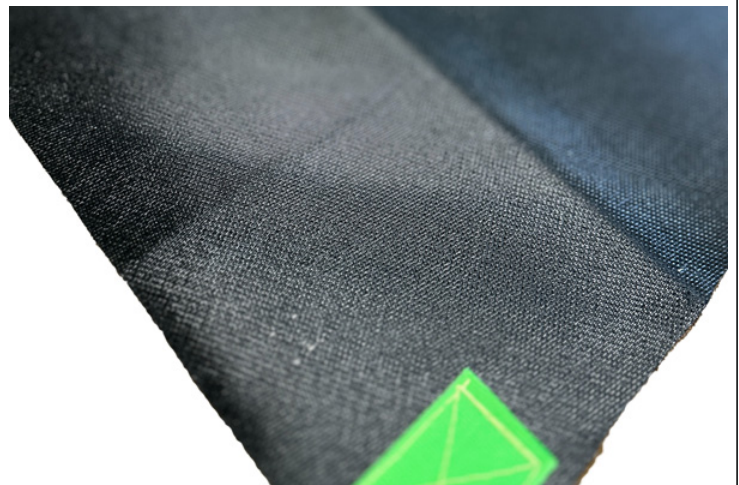

### Options

- Supplied in sturdy bag
- Cabinet available
- Big buons that are easy to control
- Dark grey colour
- Suitable from small cars to large Pickups

\* The blanket has +/- 5% tolerance for its width and length The width and length can be affected by environmental temperature and moisture level. Some of the cloth is included in the folded margin.

Our blankets have no expirationdate, they have a shelflife of 25 year+ when properly stored.

### Pictures



Visit our website:

**FIREISOLATOR.COM**

© COPYRIGHT T-ISS B.V. - All rights reserved

**T-ISS**  
Safety Suppliers

Global